


Disassembly and Recycling Document
Disassembly Time: 10 min / No Special Training Required


Tools Required

- Safety Glasses
- 5/32 Allen Wrench
- 3/16 Allen Wrench
- 5/64 Allen Wrench
- #2 Phillips Screwdriver
- Mallet

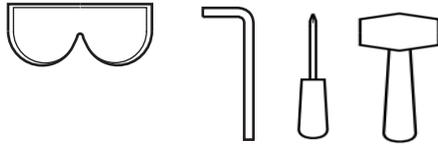

Breakdown Steps

1. Flip the chair over and remove the 8 screws holding the seat in place. Slide the seat forward and pull up to remove the seat. (Figure A1)



- Seat Back
- Material: Glass Filled Nylon, Mesh Upholstery



- Socket Head Shoulder Screw
- Material: Steel



2. Unscrew the 2 screws at the bottom of the back and pull the seat back up to remove. (Figure B1)



- Seat
- Material: Polypropolyne, foam



- Carriage
- Material: Aluminum



3. Unscrew 2 screws per arm to remove the arm pads. (Figure C1)



- Socket Head Shoulder Screw
- Material: Steel



- Spring
- Material: Steel



Disassembly and Recycling Document

Disassembly Time: 10 min / No Special Training Required

4. Flip the chair over and remove the casters from the base. (Figure D1)



-Cylinder
- Material: Aluminum, Steel



- 5 Blade Base
- Material: Aluminum



- Casters
- Material: Steel, Nylon

